

Smart Curtain Touch Switch

Instructions

Before using this device, please read this manual and properly stored it for future reference

Model: TC-U9CL-B

6. Product specification

Working Voltage	AC 110V~240V
Support max operation time	5 mins
Support max motor power	400W
Static electricity power consumption	< 50mW
Working temperature	-10 ~ +55°C
Working humidity	10% ~ 95%
Storage temperature	-20 ~ +70°C
Dimension	86*86*29mm

Notice:

- 1). Before installation the device, make sure the power has cut off.
- 2). The load output do not beyond than load power

- 3 -

1. Products description


The smart curtain touch switch is the module which through the home automation terminal, to realize home electrical driven curtain wireless remote control, to provide a convenient life for people.

2. Features


- 1). Delicate and easy to installation, could replace the normal control switch directly.
- 2). Dual control mode, support remote control and touch control.
- 3). Intelligent electric auto protection, save energy.
- 4). Support remote control by smart home control terminal and the relative APP.

3. Product appearance and structure

1). Appearance

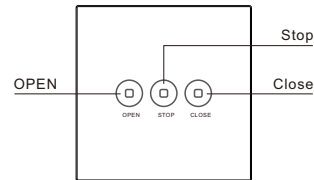

2). Wire Diagram

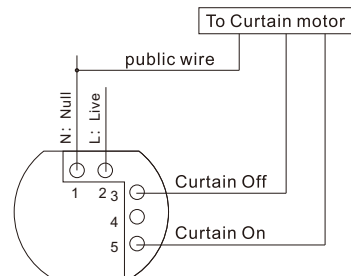

- 1 -

4. Installation process

- A. Power off and connecting the wires
 - B. Take down the glass cover, and install to the install box
 - C. Install the glass cover
 - D. Power on
- Installation Request: The depth above 40mm;
Installation height with 1.5M ~ 1.7M

5. Operation Instruction

1). Register operation

Long press: "STOP" button to enter registering status, meanwhile the blue back light will flashing. During the registering status, if the user touch "OPEN" or "CLOSE" button, it could exit the registering status.

Under the registering status, if the switch received configuration command signal from the control terminal, and the "STOP" key back light continue on, that means the register is successful.

Exit the register status after the configuration, and if time out (within 3 mins), the system will auto exit from the register status.

2). Open or close the curtain

Press the "OPEN" or "CLOSE" button to open or close the curtain, and during the processing of open or close with blue back light will be on, and press "STOP" button to stop.

The slight blue back light will continue on if no operation.

3). Curtain Calibration

After installation and register, user should calibration for the curtain

- a. Before calibration, make sure the curtain all closed.
- b. Long touch "CLOSE" button to enter the calibration status, and the "OPEN" key and "CLOSE" key are in blue back light flashing, means the device in calibration status.
- c. During calibration status touch "OPEN" button, the curtain will open for calibration, and the blue back light of the "OPEN" key continue on.
- d. After the curtain is fully open, then touch the "OPEN" button again immediately to finish the calibration.
- e. If touch "STOP" button during calibration status, the device would exit from the operation.

- 2 -