


Video Intercom


General specification
Before using, please read this manual in detail, and properly stored for later using as a reference.
Model: TC-X5KT-1

1、The product accessories

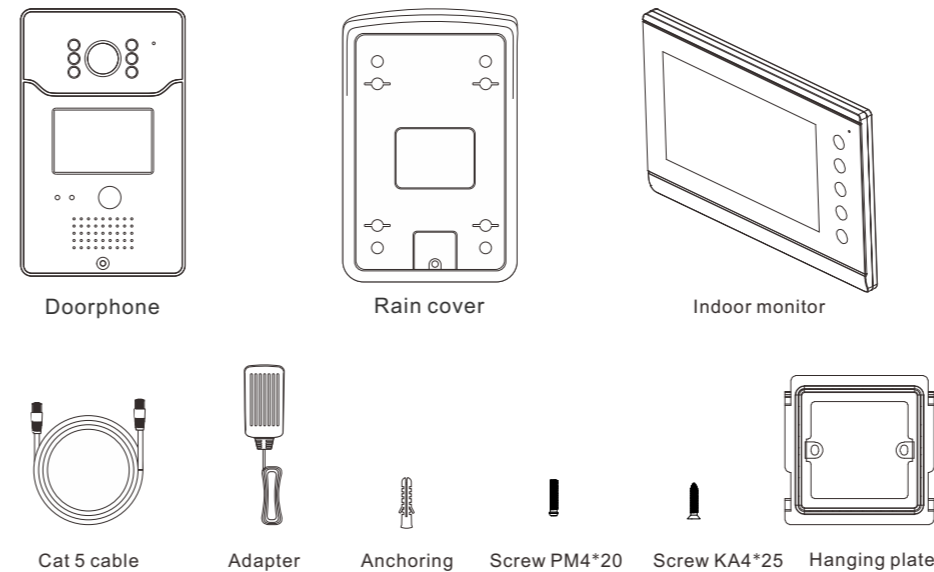


2、Installation instructions


TC-X5D-B1 Outdoor phone installation

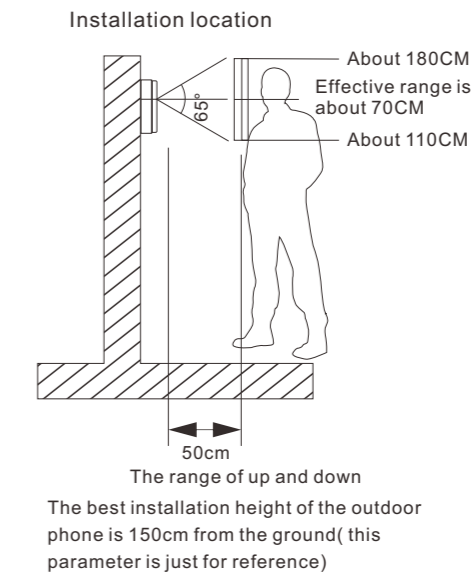

Installation diagram

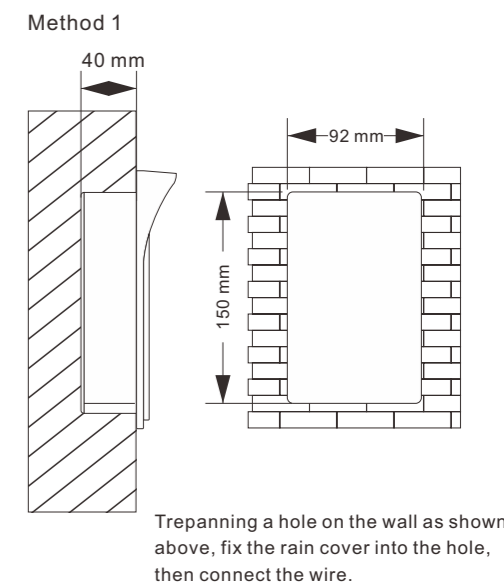


Method 2

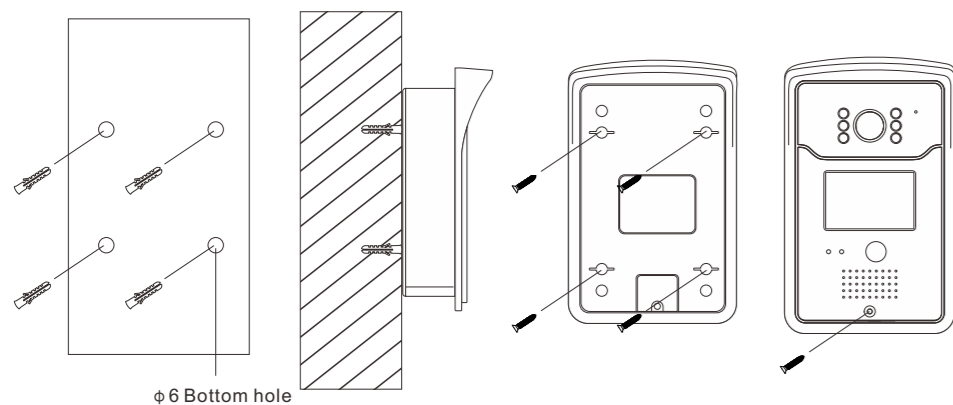


- Installation:**
1. Unscrew the screw on the outdoor phone , remove the rain cover;
 2. Use the screw (KA4*25) and fix the rain cover on the wall , the height is 1.40m (Can use method 1 or 2);
 3. Install the outdoor phone in the rain cover , use the screw(PM4*20) fix the outdoor phone into the rain cover.

TC-X5KT-Z1 Indoor installation

Installation location

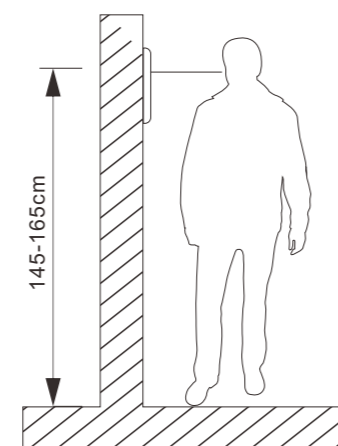


Installation diagram

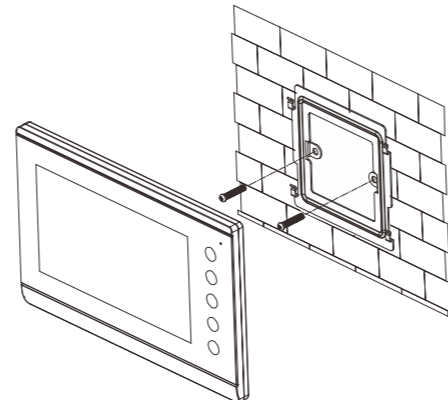

- Installation instructions:**
1. Install the embedded 86*86mm boxes on the wall, about 1.5 meters from the ground.
 2. Use PM4 * 20 screw lock the hanging plate on the 86*86mm boxes.
 3. Connect the wire on the indoor monitor then , hang it on the hanging plate.

3、Wiring instructions

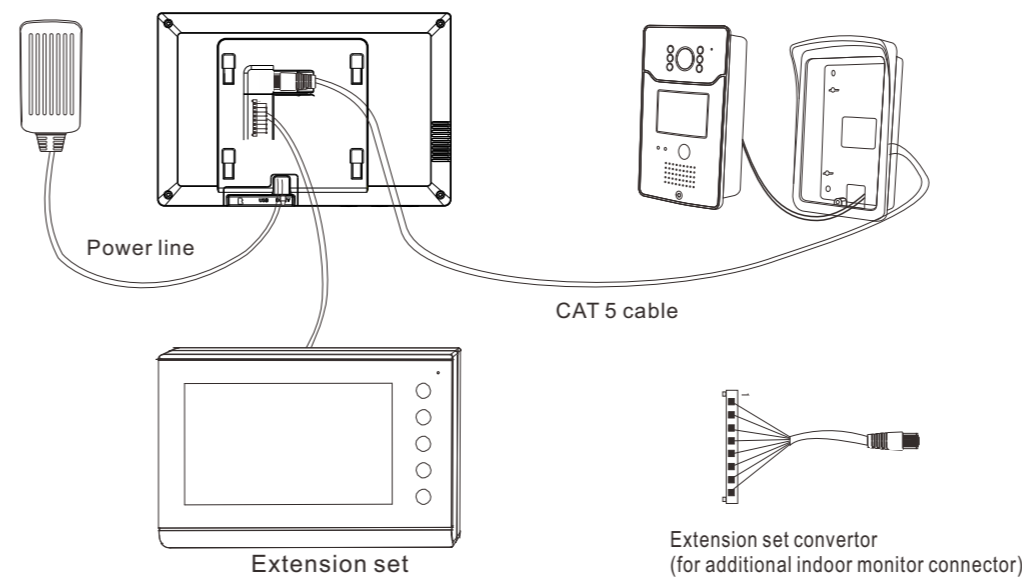

4、Instructions

TC-X5KT-Z1:

- Answer/Hang up: when call come, short press to answer the call. Short press again to hang up.
- Unlock: short press to unlock the door.
- Monitoring : long press at least for 4 seconds to monitor the door.
- Don't disturb : long press Answer/Hang up button for 4 seconds to enter Don't disturb pattern, long press for 4 seconds again to quit.
- The power indicator: Red
- Don't disturb indicator: Red

TC-X5D-B1:

- Short press to call the indoor monitor.
- Work power indicator light is red.
- Unlock interface, output signal of unlock and lock .

5、Technical parameters

1. This is an ancillary used product, connection through the network cable (568 b wire sequence), suggested that cable length is 10 meters or less.
2. Use 12 v , 1.5 A DC power supply.